


**WOS exclusive
injection molded,
thermoplastic casing
centralizer**

CentralizR™

 Cost savings and predictability over steel constructed competition

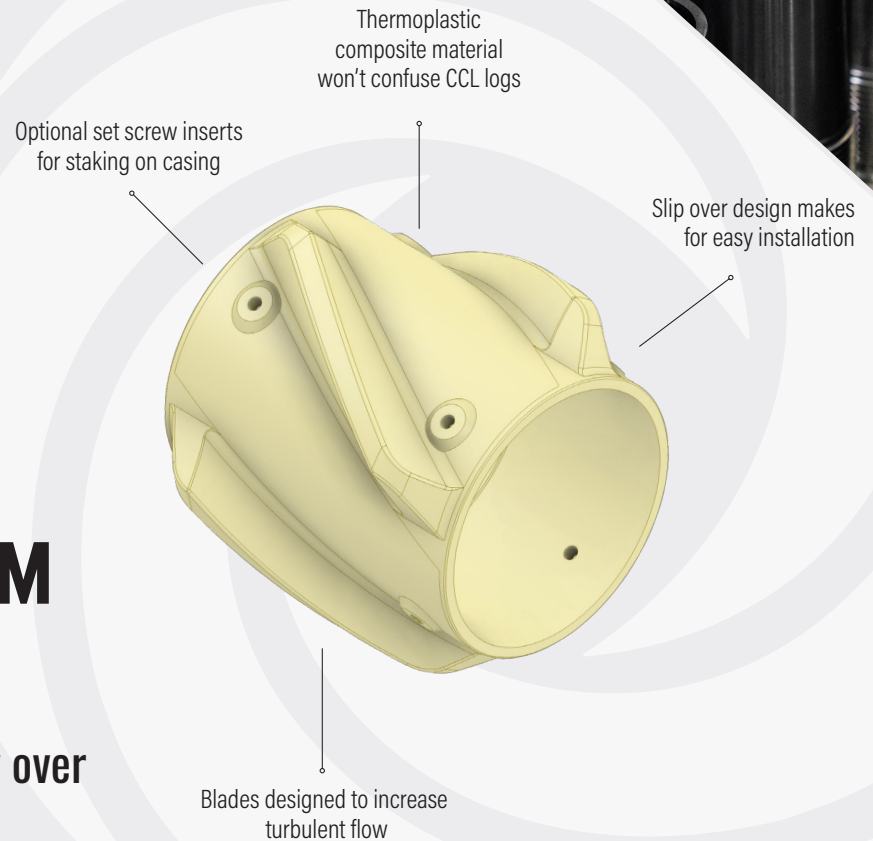

About This Product

The WOS CentralizR enables casing strings to reach total depth efficiently, provides optimal standoff for mud displacement, and greatly enhances cementing operations. Made of injection molded, thermoplastic design, WOS introduces the next generation of composite centralizers. The one-piece molded CentralizR has a smooth and slick design, is heat resistant and highly durable.

Benefits

- Blade design increases standoff for better mud displacement and overall better cement job
- Slip on design of lightweight materials allow for efficient, safe and repeatable make up
- Manufactured by WOS to enhance repeatability and customization for specialty operations
- Installation, handling and storage simplified over steel constructed competition
- Does not confuse CCL

 Low wear index ensures centralizer OD consistency when running in hole

Casing CentralizR™

Product Details

Casing Size (OD)	9-5/8"	5-1/2"
Min. Hole Size (ID)	12.125"	8.313"
ID Thru Centralizer	9.787"	5.7"
Centralizer OD	12"	8.2"
Length	8"	8"
Weight	5.7 lbs.	4.0 lbs.
Staked	Optional Upon Request	
Temperature Rating	400 Degrees	



 Available in slip over or staked casing configurations

Features

- Increased impact resistance and effective abrasion resistance results in high durability
- The dynamic blade design improves pressure drops, increased turbulent flow
- Available with multiple running operations, floating or integral set screws
- Tolerant to various climate conditions

Taber Abrasion Index

Material	Index Rating*
PVC	100
Polycarbonate	45
G-10/Fiberglass	10
Acetal	20
WOS Polymers	7
Halar Fluoropolymer	5

*The wear index is 1000 times the loss in weight in milligrams per cycle



SCAN CODE TO VIEW PRODUCT PAGE

★ MADE IN HOUSTON, TX, U.S.A. ★